


# MCS MailStream Direct

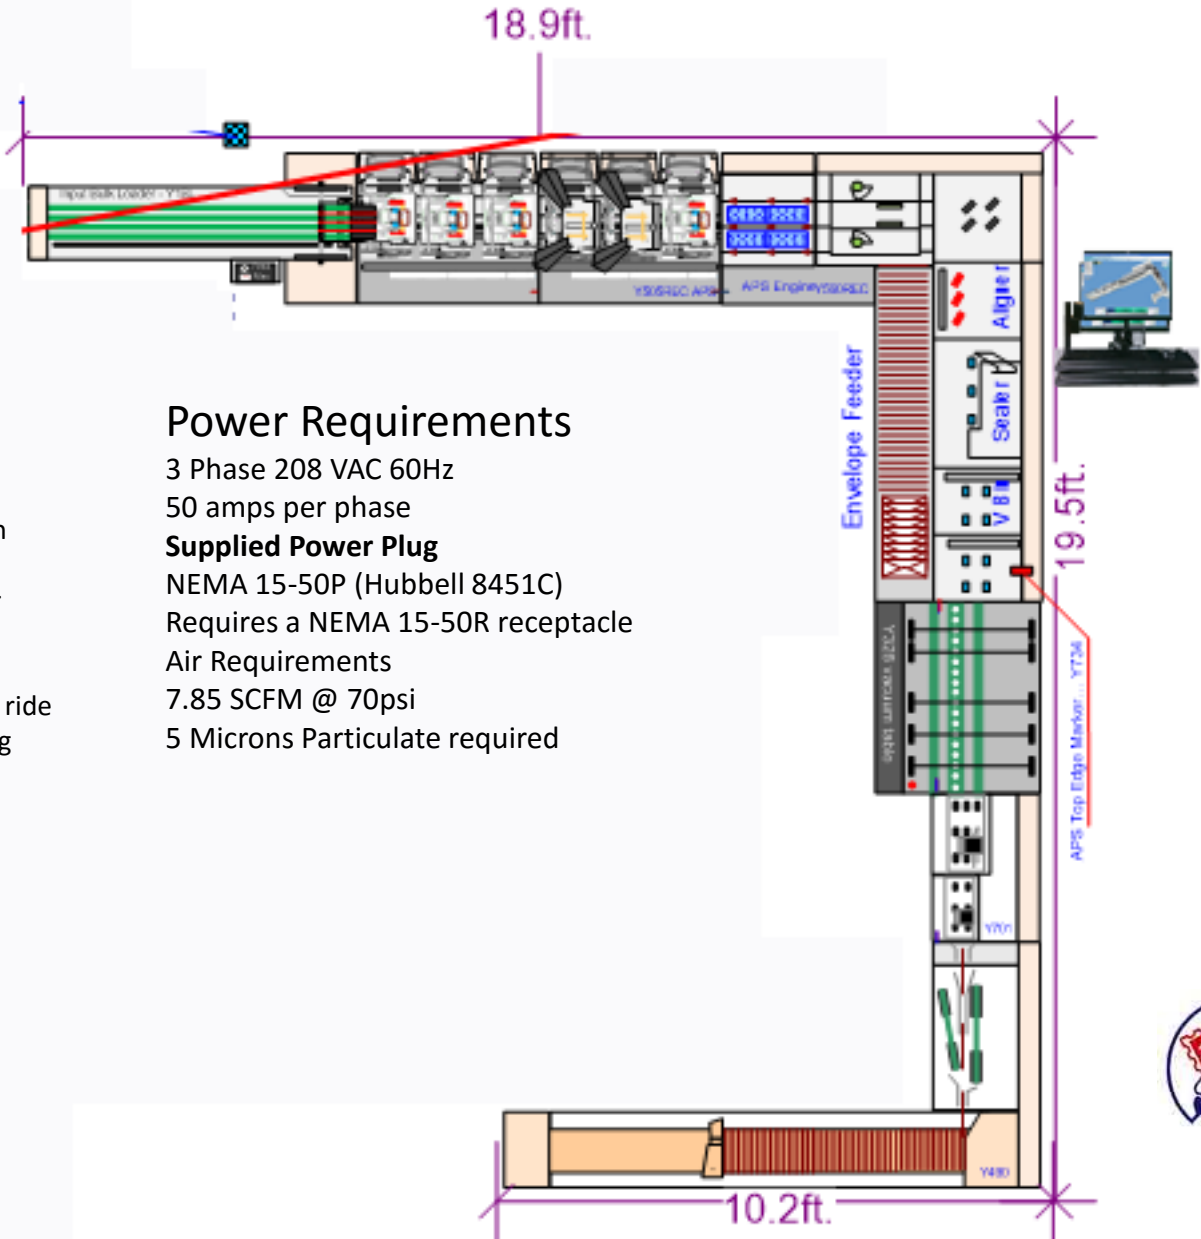

## Power Requirements

- 3 Phase 208 VAC 60Hz
- 50 amps per phase
- Supplied Power Plug**
- NEMA 15-50P (Hubbell 8451C)
- Requires a NEMA 15-50R receptacle
- Air Requirements**
- 7.85 SCFM @ 70psi
- 5 Microns Particulate required

**Shipping**  
 MCS Equipment shipped on pallets common carrier  
 Must have loading dock for standard shipping cost

MailStream Direct ships air ride moving van needing loading dock.

